

Important Notes:

- 1. The amplifiers capable of delivering an output signal with an impedance of 4ohms or less are recommended.
- 2. Bridged amplifiers (external or internal) are not recommended to be used with this speaker selector.

Speakers Impedance Frequency	X1		X2		X3/4		X5/6	
	1	2	3	4	5	6		
100Hz	8.2Ω	8.7Ω	13.9Ω	9.9Ω	14.9Ω	12.6Ω		
500Hz	8.5Ω	9.1Ω	14.0Ω	10.2Ω	15.1Ω	12.3Ω		
1KHz	8.5Ω	8.9Ω	14.6Ω	10.0Ω	15.2Ω	12.6Ω		
5KHz	8.5Ω	8.9Ω	14.8Ω	10.7Ω	15.2Ω	13.0Ω		
10KHz	8.5Ω	9.3Ω	15.7Ω	11.2Ω	16.0Ω	13.0Ω		

SPECIFICATIONS

Speaker connections:.....4Ω or 8Ω
Frequency Response:30Hz ~ 20 KHz ± 2dB
Max Audio Attenuation:- 42 dB
Power Handling:100W RMS Max
Dimensions:445mm L x 170mm W x 58mm H



This appliance is not intended for use by persons (including children) with reduced physical, sensory and mental capabilities, or lack of experience or knowledge, unless they have been given supervision or instruction concerning the use of the appliance by a person responsible for their safety. Children should be supervised to ensure they do not play with the appliance.

For repair or service please contact your place of purchase.

Note: Under no circumstances should you attempt to repair the device yourself or via a non-authorised Altronics service centre, as this will invalidate the warranty! During the warranty period, we undertake to repair or replace your product at no charge if found to be defective due to a manufacturing fault. The warranty excludes damage by misuse, neglect, shipping accident, incorrect installation or no fault found.

NOT FIELD SERVICEABLE.

Distributed by Altronic Distributors Pty. Ltd. Perth, Western Australia.

Phone: 1300 780 999 Fax: 1300 790 999

Internet: www.altronics.com.au



A 2387 6 Zone 100W Speaker Switcher Attenuator



Operating Instructions

This speaker selector and volume control unit enables you to use up to six pairs of speakers throughout your home. The volume for each speaker pair can be controlled individually. The output from the amplifier/receiver is wired directly to the A 2387. From there, speaker wire is run to speakers located in various rooms throughout the house. Music for each location is selected by pushing the front panel ON/OFF buttons, and adjusting the appropriate volume control to the desired level.

FEATURES:

- Manual impedance matching adjustment for high acoustic quality
- 4Ω or 8Ω speaker compatible.
- Speaker power: 100W/channel (RMS).
- Removable connector can handle 12-22 AWG capacity speaker cable.
- Recessed areas on front panel for labeling the room/zones. (labels not included)
- 19" rack mounting option.
- Requires no power to operate.

1. Impedance Matching protection functions:

A 2387 is provided with selectable impedance compatible design and high acoustic quality for enjoyment. No matter whether you are using 4Ω or 8Ω speakers, the A 2387 can be set manually for impedance matching using the impedance pair selector located on the back of the unit. While multiple speakers are connected to the amplifier at the same time, the reducing impedance of the speakers may adversely affect the amplifier. Therefore, it is important to select the correct impedance-pair setting. Set the number of the speaker pairs that you propose to install on the speaker output, and use a flat-head screw driver to make the adjustment for impedance matching on the back of unit.

Note: The unit is factory preset to have the impedance-pair rotary switch set on '6'. The number should be selected accurately in accordance with the quantity of the speaker pairs that have been connected to the unit, in order to optimize sound quality. For example, if using four speakers, connect speakers to any outputs and set the impedance pair switch to "2", referring to the two pairs of speakers being used.

Figure 1: Rear panel connections


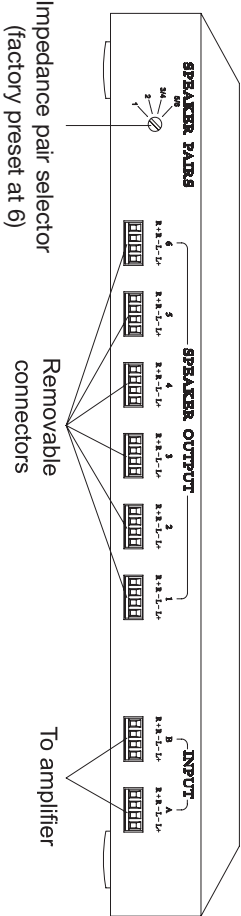


Figure 2: Front panel controls

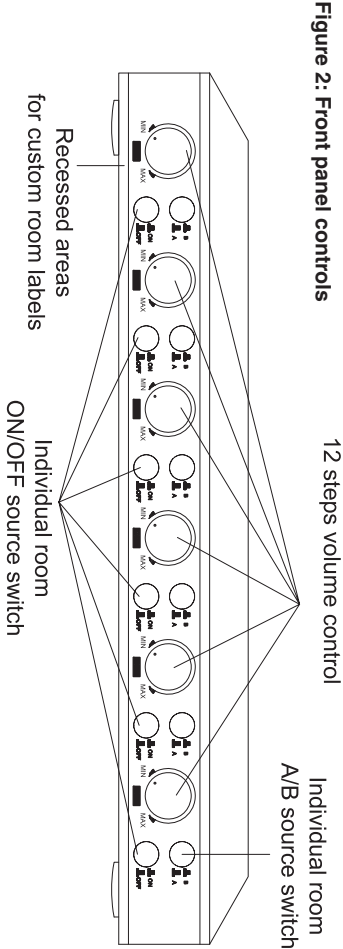

2. Independent Amplifier Input Control

A 2387 has two sets of amplifier inputs – A and B – on the rear panel. There is a push-button switch on the front panel beside each speaker volume control knob that allows a user to choose which input source will feed into which speaker pair. Thus, a user can have either amplifier's audio feeding into speakers in one room or all rooms, or a combination of different sources in different rooms.

3. Switching Speaker pairs ON/OFF.

A 2387 has ON/OFF switches for each independent speaker pair control. A user can therefore turn the audio off or on for a given room. Note: For safety reasons it is recommended for each speaker output be set to the 'OFF' position before commencing speaker installation.

4. Volume Control:

The A 2387 sound volume control knob has 12 steps which applies up to -42dB attenuation on the audio signal (as shown in the table below). The frequency response is 30Hz-20KHz with ±2dB of deviation. The first position is OFF. Turn the knob clockwise to increase the volume for each speaker pair.

Switch Steps	1	2	3	4	5	6	7	8	9	10	11	12
Attenuation	OFF	-42dB	-36dB	-30dB	-24dB	-18dB	-15dB	-12dB	-9dB	-6dB	-3dB	0

INSTALLATION

Remember that the left and right audio channel circuits are separated in this device. Therefore, it is important to make sure that the input connections (+ and -, L and R) are wired correctly from each source (A and B), and to each speaker pair.

OPERATION

This device is easy to operate. It is effectively a two into six audio matrix switcher with impedance matching capability for speaker pairs.

1. Firstly, connect the source amplifiers to the A and B inputs.
2. Then install the speaker pairs where they are required inside the home or office. Connect the speaker wires into the unit's rear panel.
3. Switch the source amplifiers on. Assign 'A' source input to chosen speakers and 'B' input to the remainder. Press A/B source switch down to select source 'B' input for a channel.
4. Turn on the speakers you wish to listen to (press the ON/OFF button in) and turn up the volume to a desired level suitable for that room.

Figure 3: Wiring diagram

